




CLADS
EXTERIOR GRADE COMPACT LAMINATES

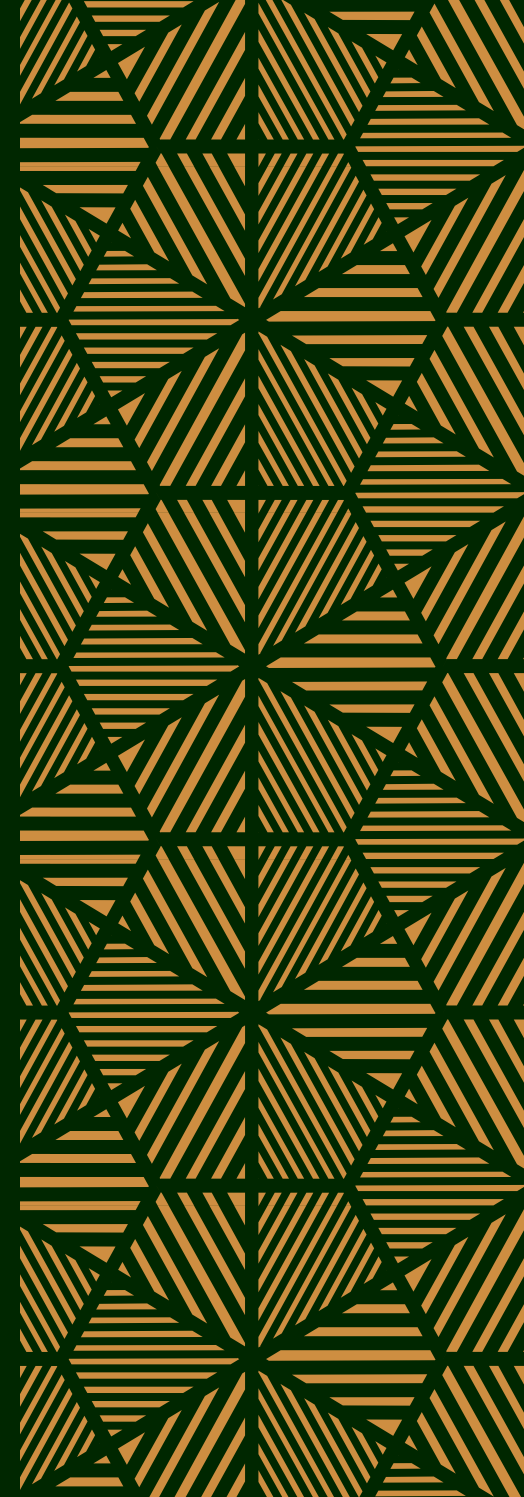

www.greenlamclads.com

CONTENTS

About Greenlam Industries	01
About Greenlam Clads	04
Product Features	06
Product Construct	07
Application Possibilities	09
Greenlam Clads: Edge Over Others	11
Collection	14
Quality Assurance	37
Technical Specifications	39



Greenlam is among the world's top 3 surfacing solutions company with its presence in over 100 countries. Greenlam has focused on developing quality products with great passion for innovation. It offers end-to-end surfacing solutions spread across laminates, compacts, interior and exterior cladding, restroom cubicles and locker solutions, decorative veneers, and engineered wooden floors and doors. With two state-of-the-art manufacturing facilities in the country, it is the first choice of architects, interior designers, and homeowners when it comes to transforming living spaces. Greenlam thinks and acts to preserve nature in its pristine form by ethically sourcing of raw materials from the world over, thereby ensuring they are environment friendly and safe to use.



CLADS
EXTERIOR GRADE COMPACT LAMINATES

SOLUTION FOR EXTERIORS

Make heads turn with the incredibly stunning Greenlam Clads. A perfect solution for exterior wall cladding, Clads is a premium range of exterior-grade compacts that elevates the decor of your building. It takes the spotlight not only for its magnificent looks but also for its exceptional functionality. Like its unmatched GLE Technology that makes it strong enough to retard fire, extreme weather conditions, and even bacteria. Coupled with its 10-year warranty, Clads is an excellent choice for exterior cladding that lasts decades.



UNMATCHED FEATURES



10 YEARS
WARRANTY



FIRE
RETARDANT



EXCELLENT
ANTI-GRAFFITI
PROPERTIES



CHEMICAL
RESISTANT



ENERGY
EFFICIENT



MATCHING
RIVETS



ANTI-DUST



MOISTURE
RESISTANT



ENVIRONMENT
FRIENDLY



LOW VOC
EMISSION



RESISTANCE
TO ACID RAINS



CORROSION
RESISTANT



TERMITE
RESISTANT



ANTI - BACTERIAL
& ANTI - FUNGAL



ACOUSTIC
RESISTANCE



GLE TECHNOLOGY




CAN WITHSTAND EXTREME
TEMPERATURE CONDITIONS FROM
-60°C TO +80°C



SUPERIOR LIGHT FASTNESS
PERFORMANCE (UV RESISTANCE)

STANDARD SIZE: 4.25' x 10' | 1300mm x 3050mm
STANDARD THICKNESS: 6mm | 8mm | 10mm
TEXTURE: **Suede**


PRODUCT CONSTRUCT

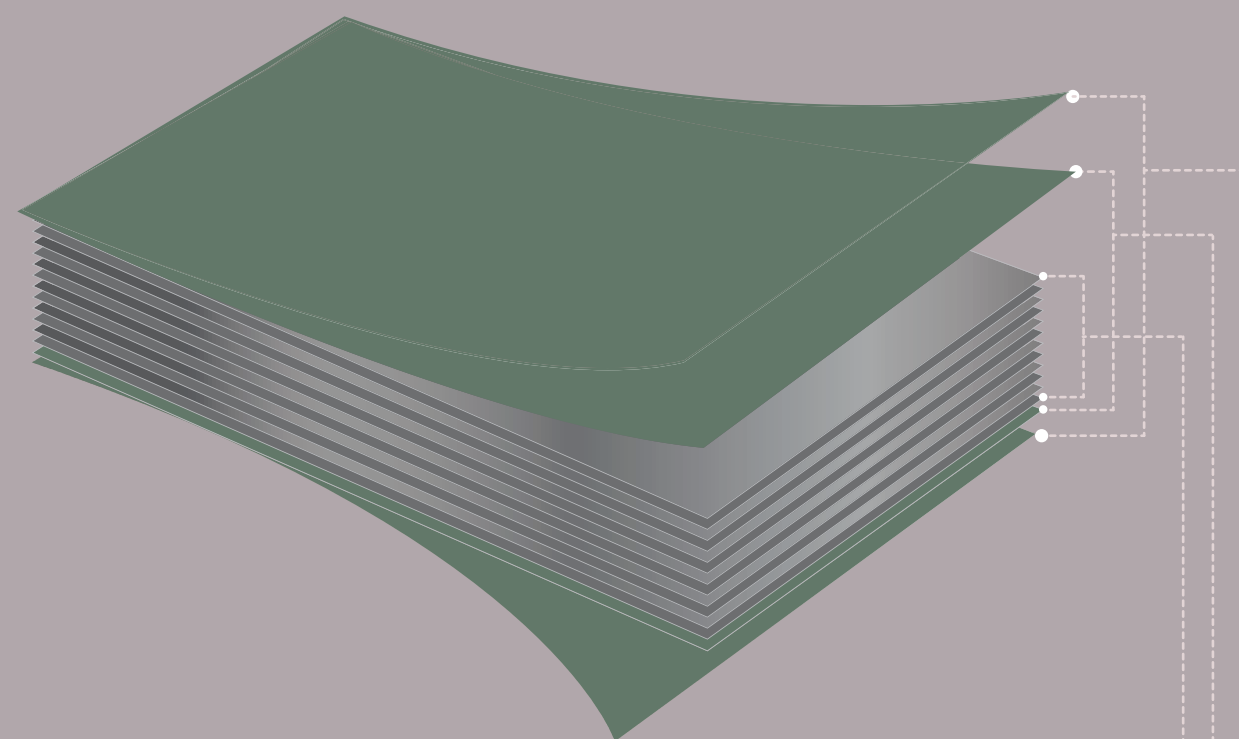


Kraft Core Treated with Special Chemicals
and Halogen-Free FR Additives in Thermosetting Resin-----

Special Exterior Décor Paper Impregnated
with Thermosetting Resin on Both Sides-----

Special Polymeric Film for
Surface Protection on Both Sides-----

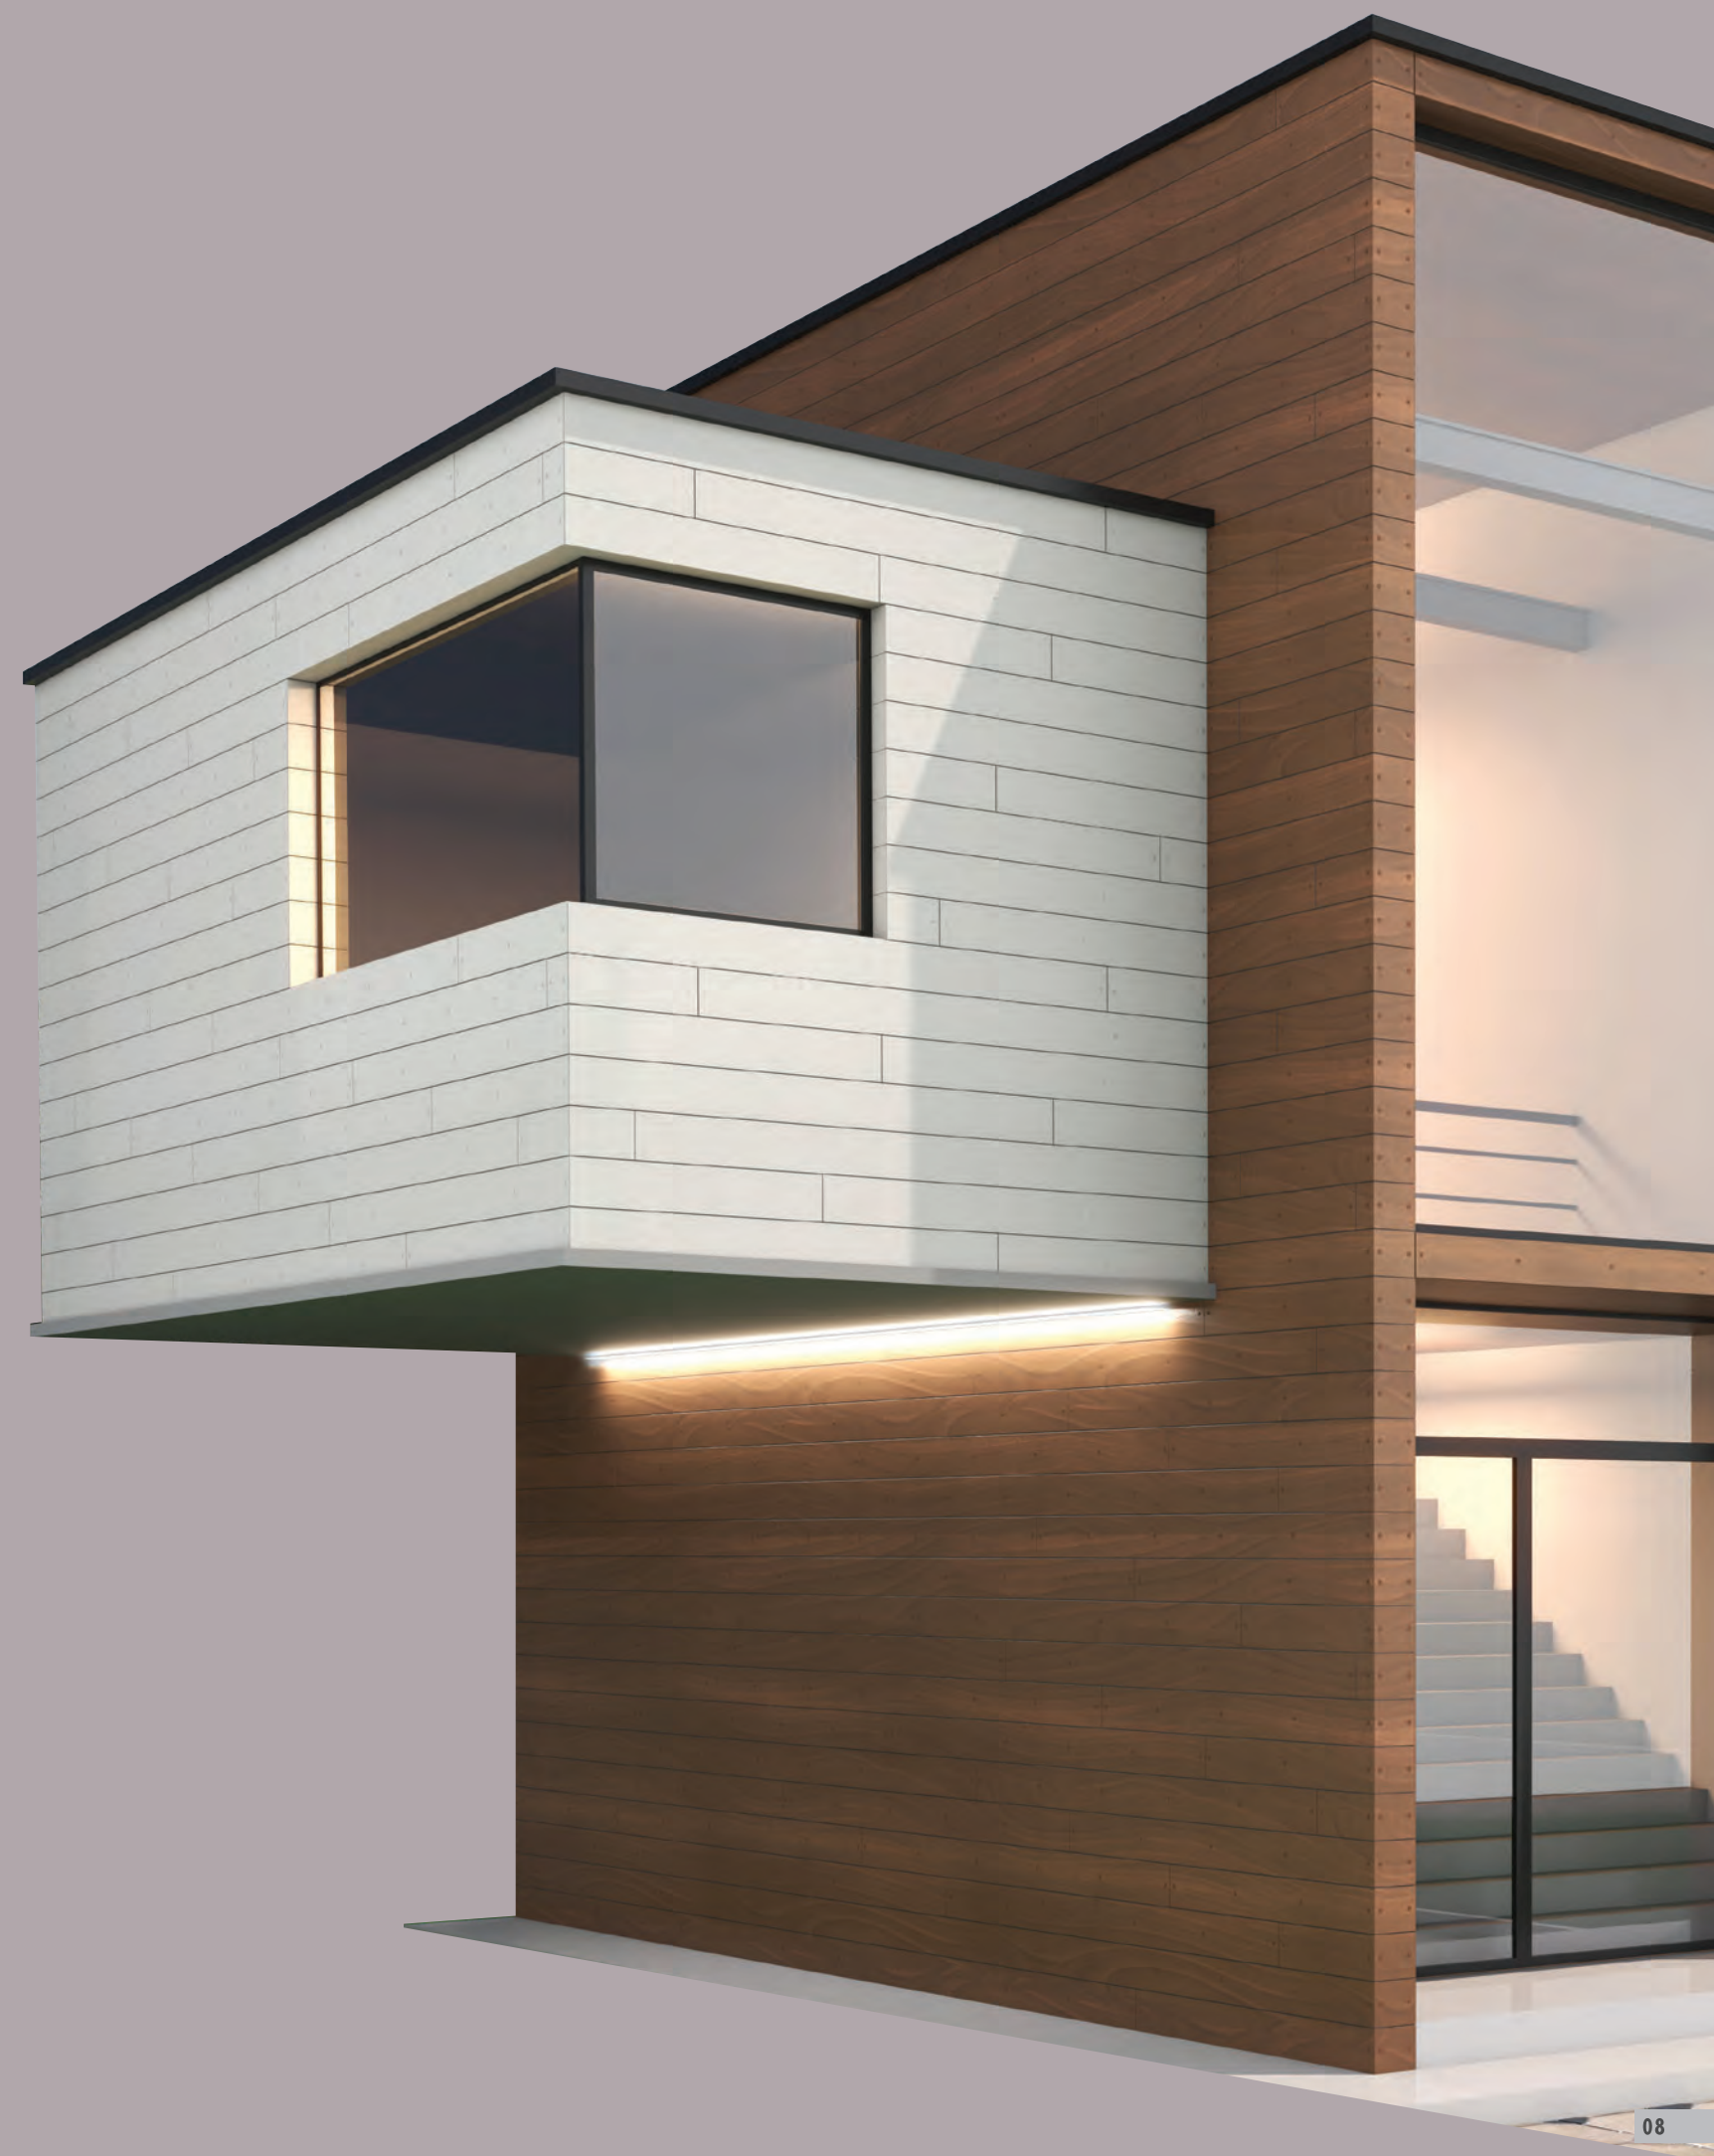


ENDLESS
POSSIBILITIES

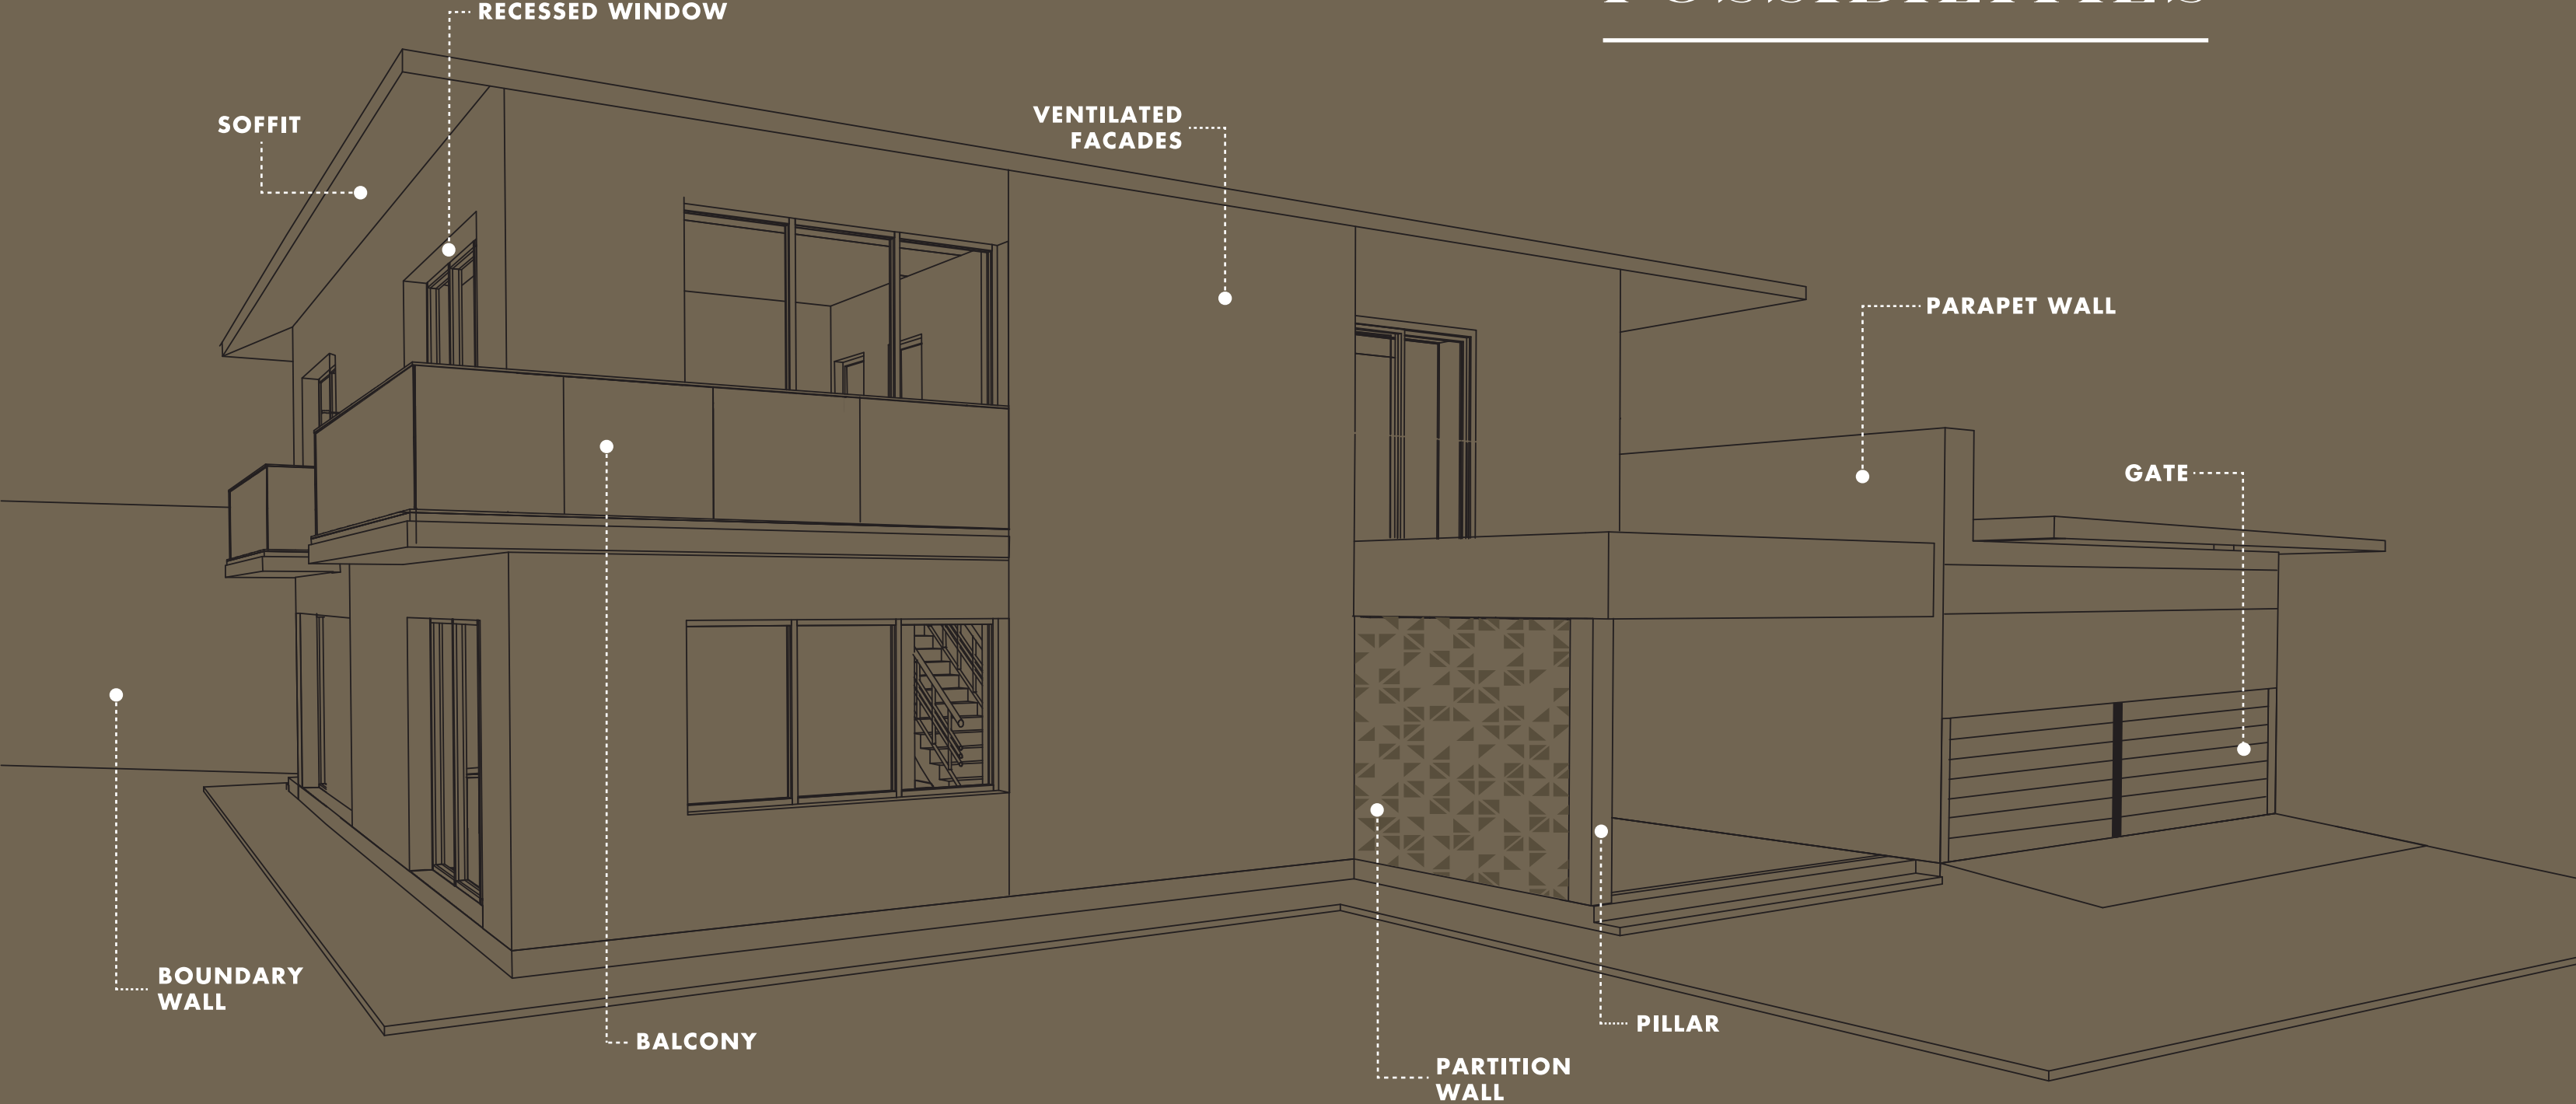

GREENLAM CLADS

EDGE OVER OTHERS


	HARDWOOD	ACP	GLASS	STONE	TILE	CLADS
Fire Retardant	✗	✗	✓	✓	✓	✓
Easy to Maintain	✗	✓	✗	✗	✓	✓
Quick & Easy Installation	✓	✓	✗	✗	✓	✓
Durability	✗	✗	✗	✓	✓	✓
Ant-Graffiti	✗	✗	✗	✗	✗	✓
Energy Efficient	✗	✗	✗	✗	✗	✓
Chemical Resistant	✗	✗	✗	✗	✗	✓
Anti-Dust	✗	✗	✗	✗	✗	✓
Corrosion Resistant	✗	✗	✗	✗	✗	✓
Customisable	✗	✗	✗	✗	✗	✓

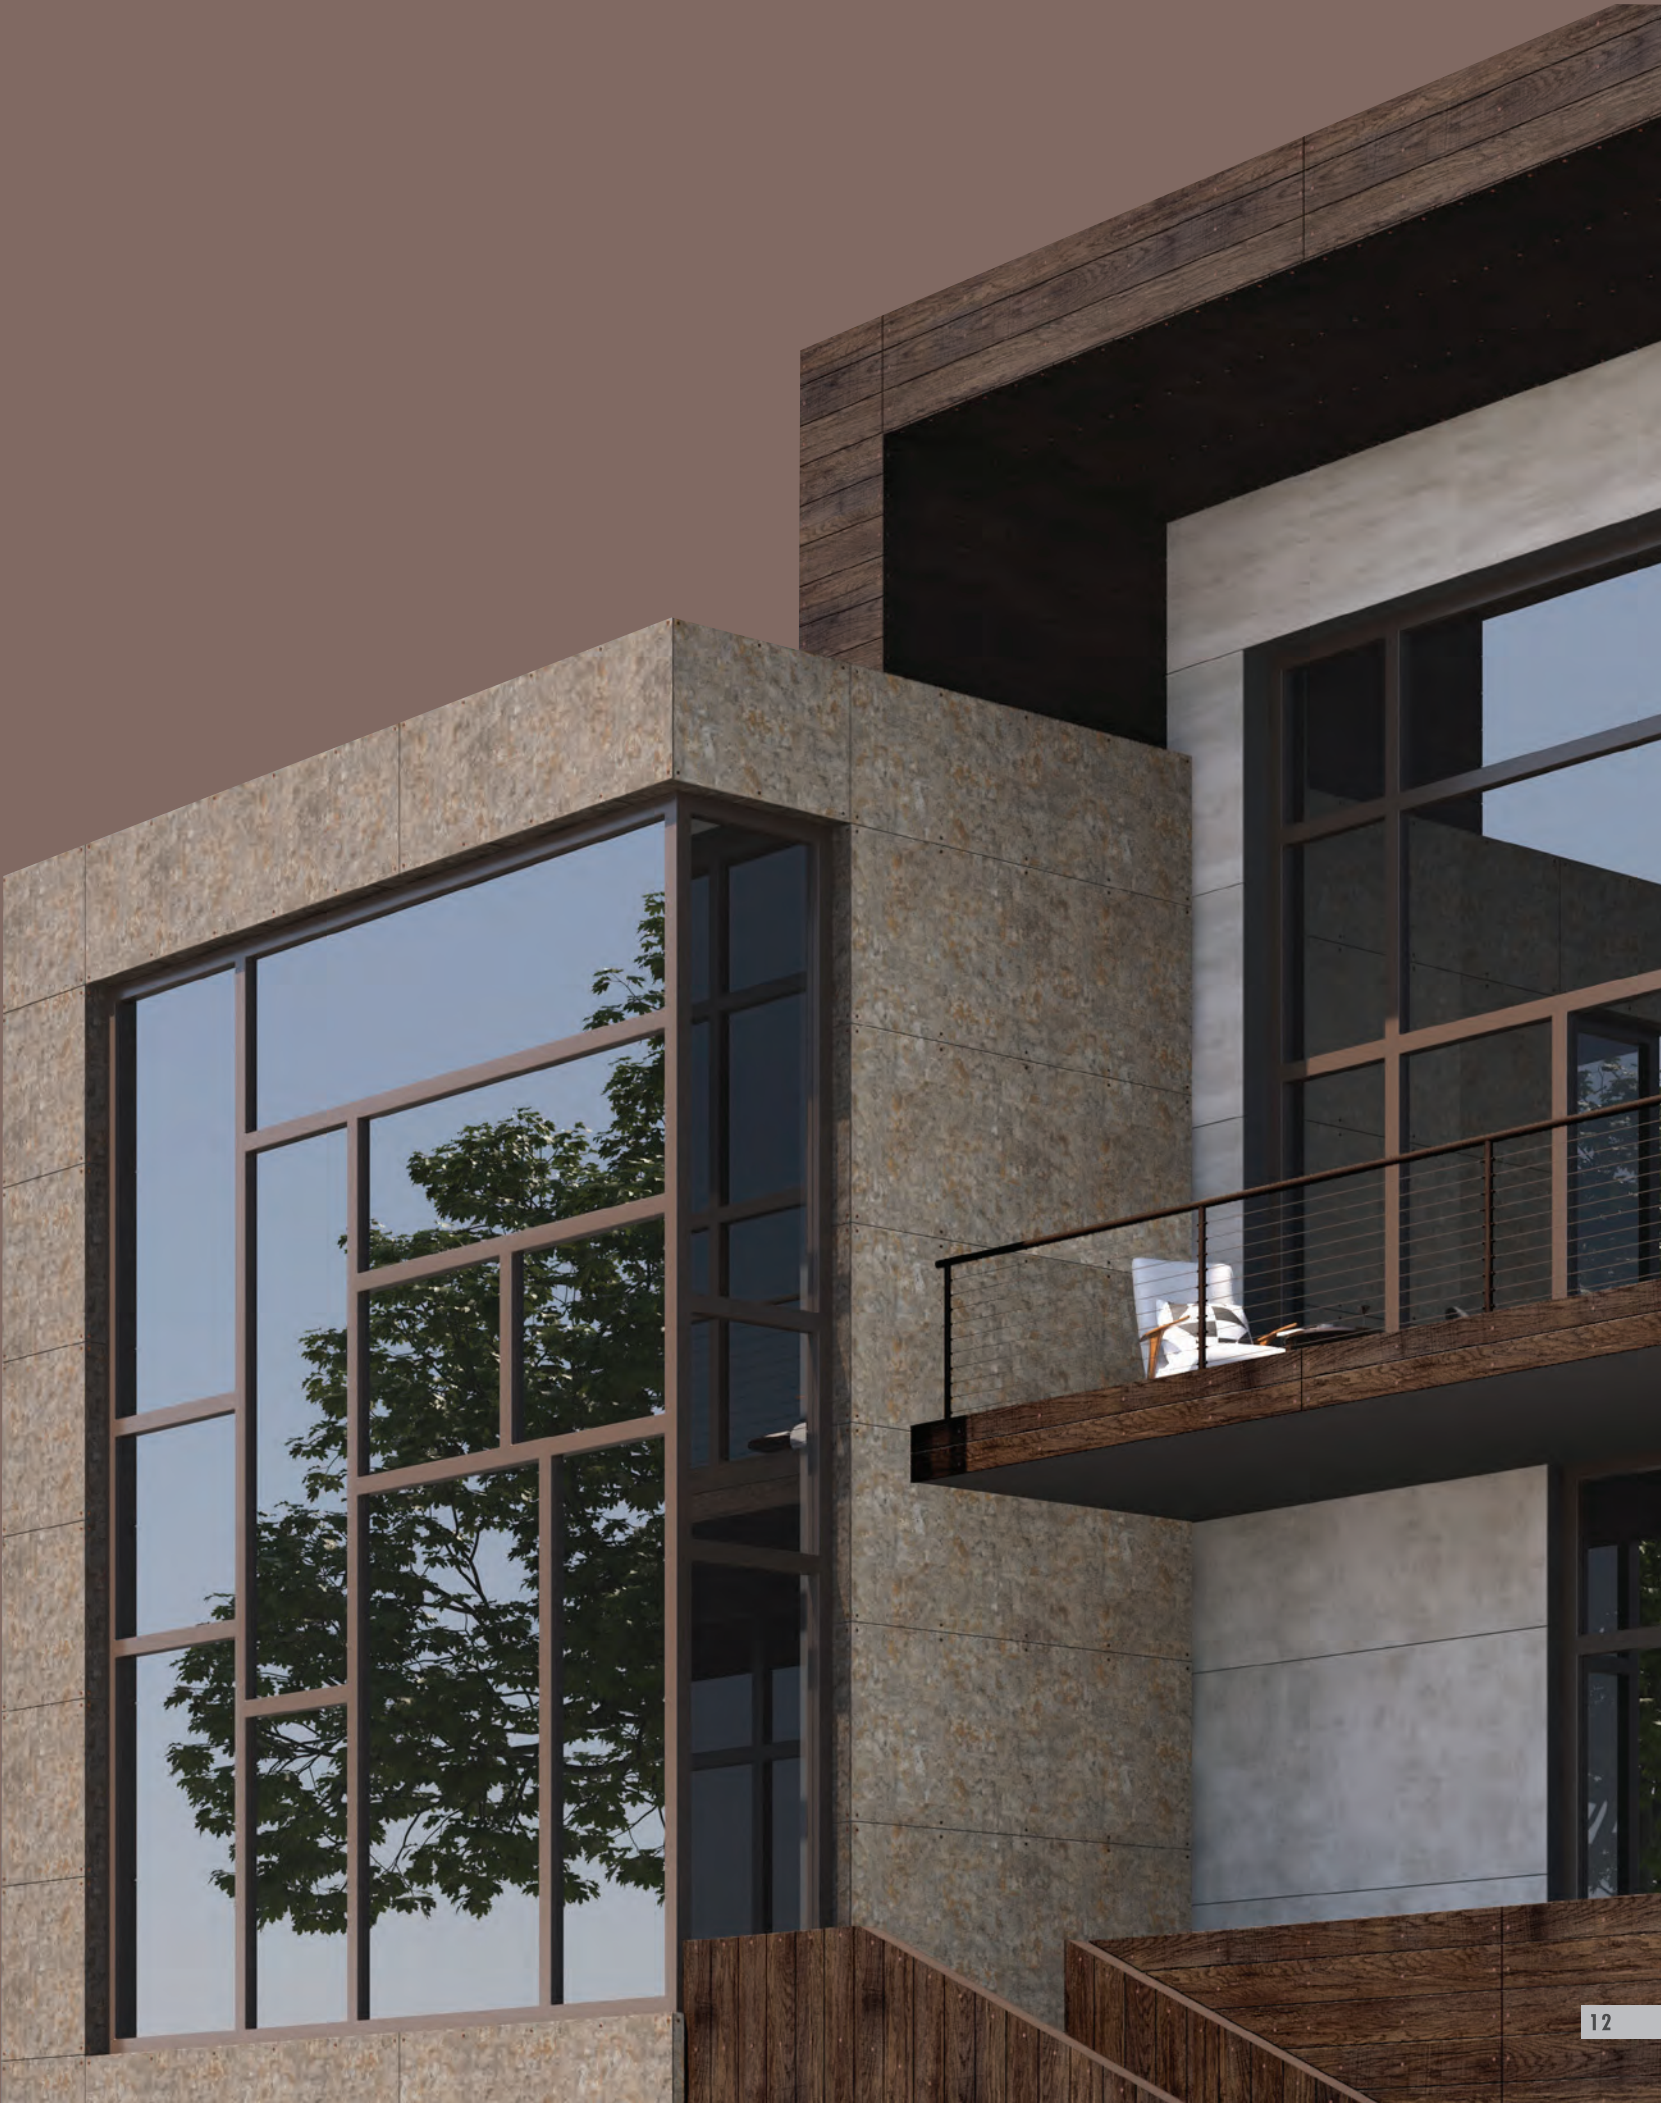




PRODUCT
RANGE

P A T T E R N S

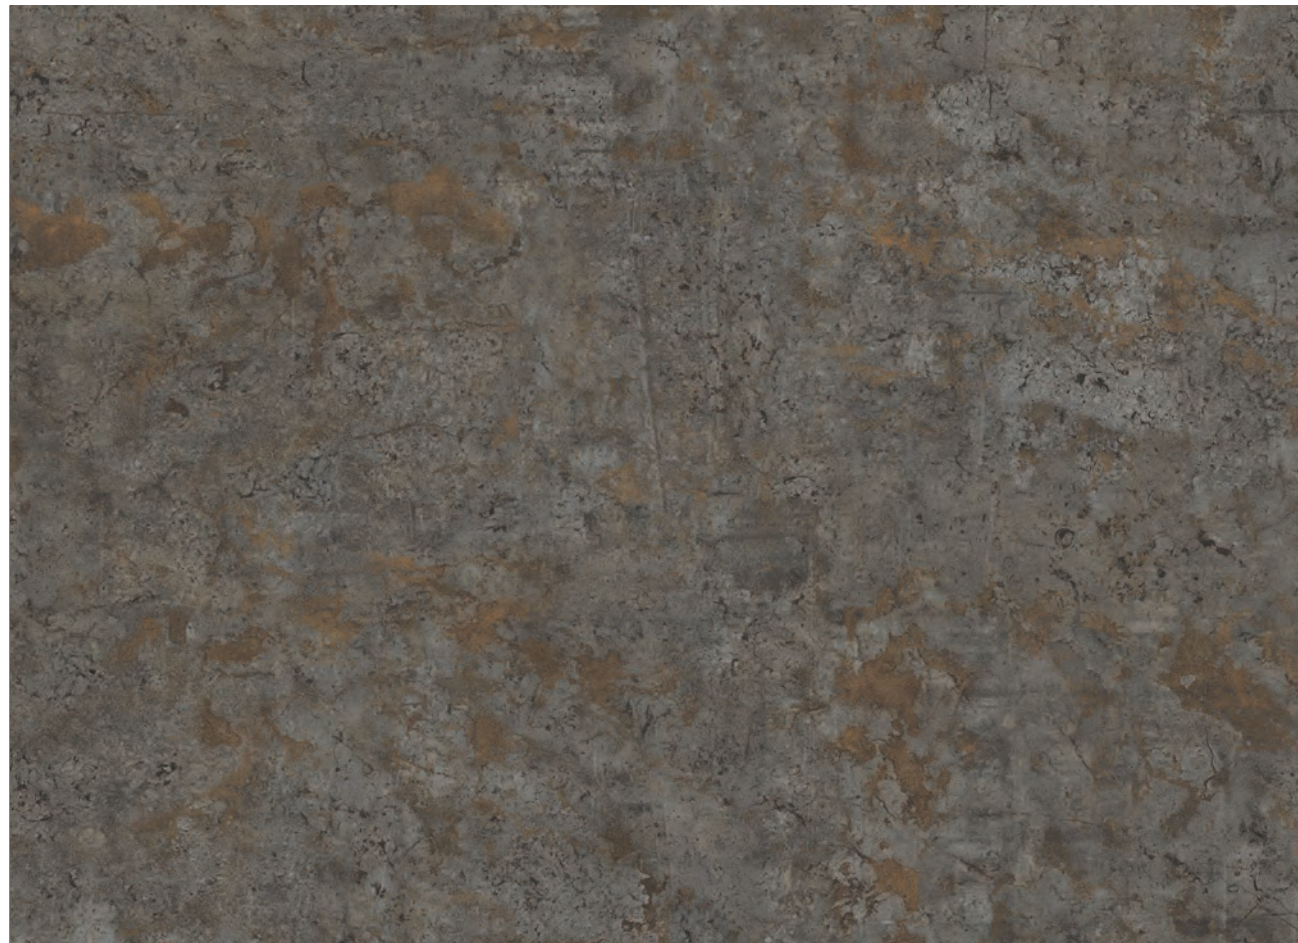


NEW

MOLTEN GREGIO **9211**

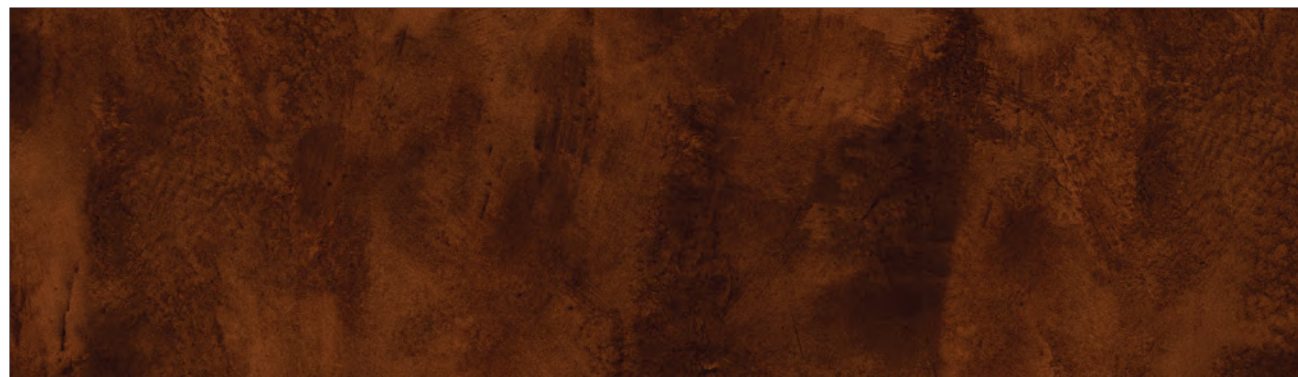


NEW

FERROUS CEMENTO **9213**

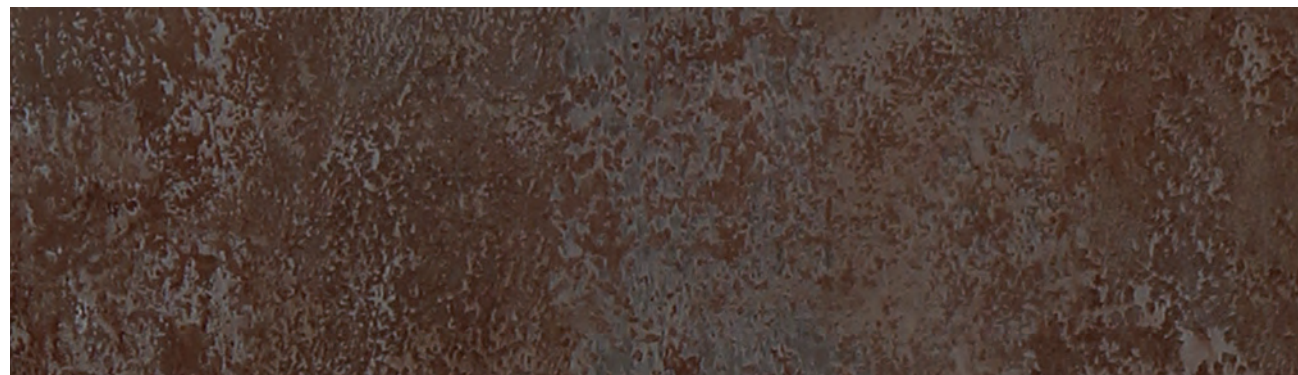

RUSSET STEIN **9209**

Samples shown are for colour and texture reference only

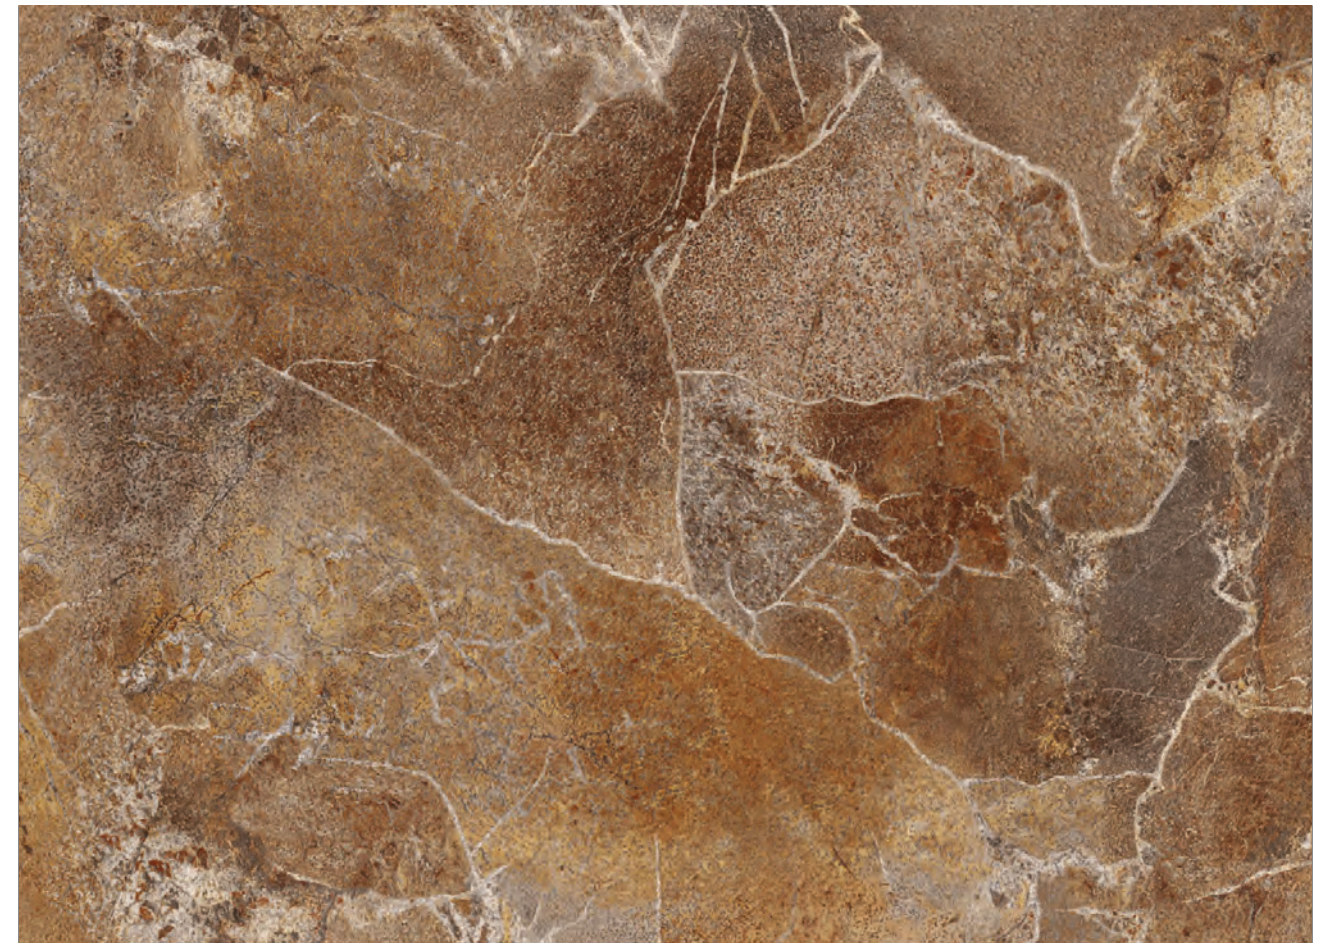

NEW


ROCK SALT **9212**



NEW

LAVA MORENO **9210**

Samples shown are for colour and texture reference only

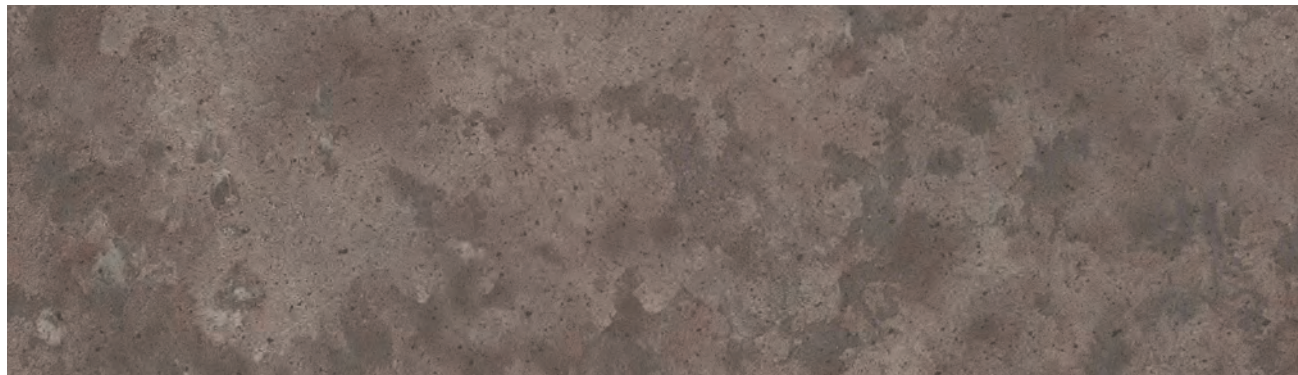


LAVA STONE **9206**



CITRON STONE **9205**



PIETRA **9208**

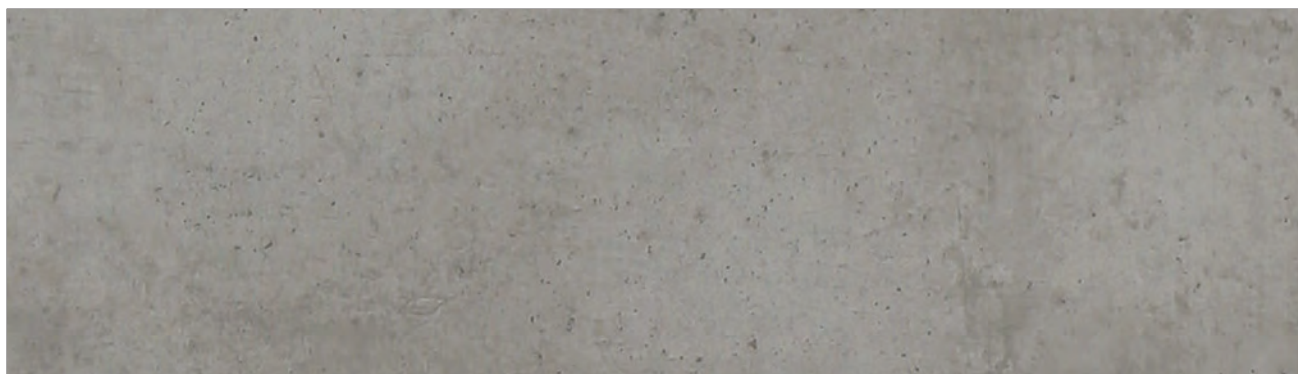


HARBOUR **9207**




CEMENTRIO **9203**




ELDORADO **9202**

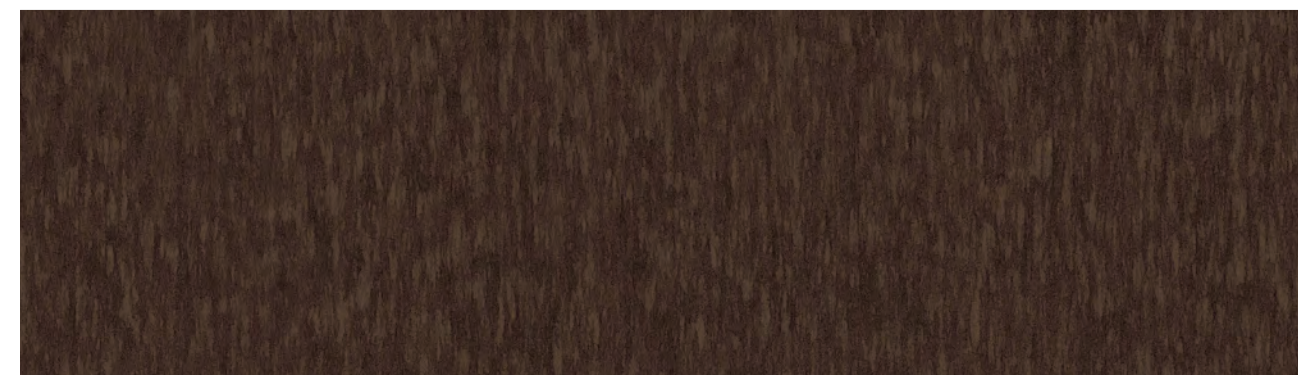

METROPOLITAN **9204**

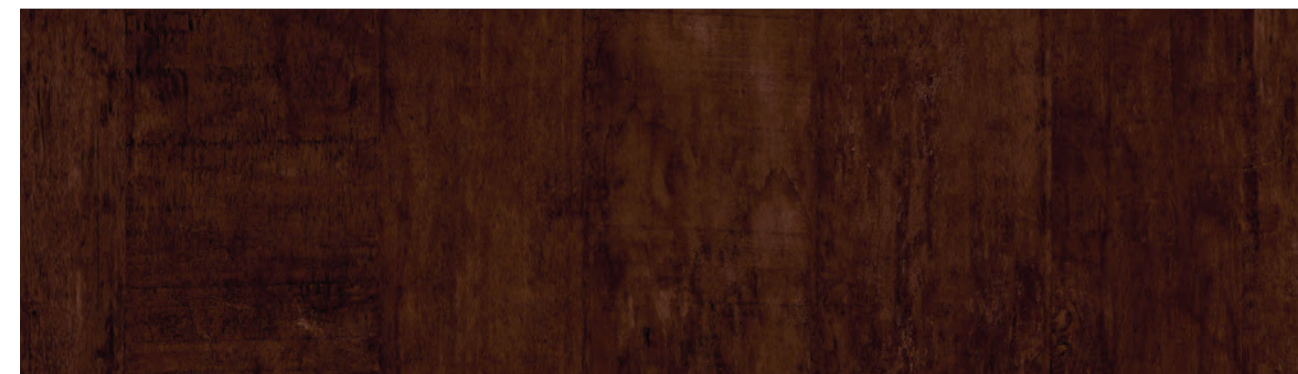

PREMIO **9201**

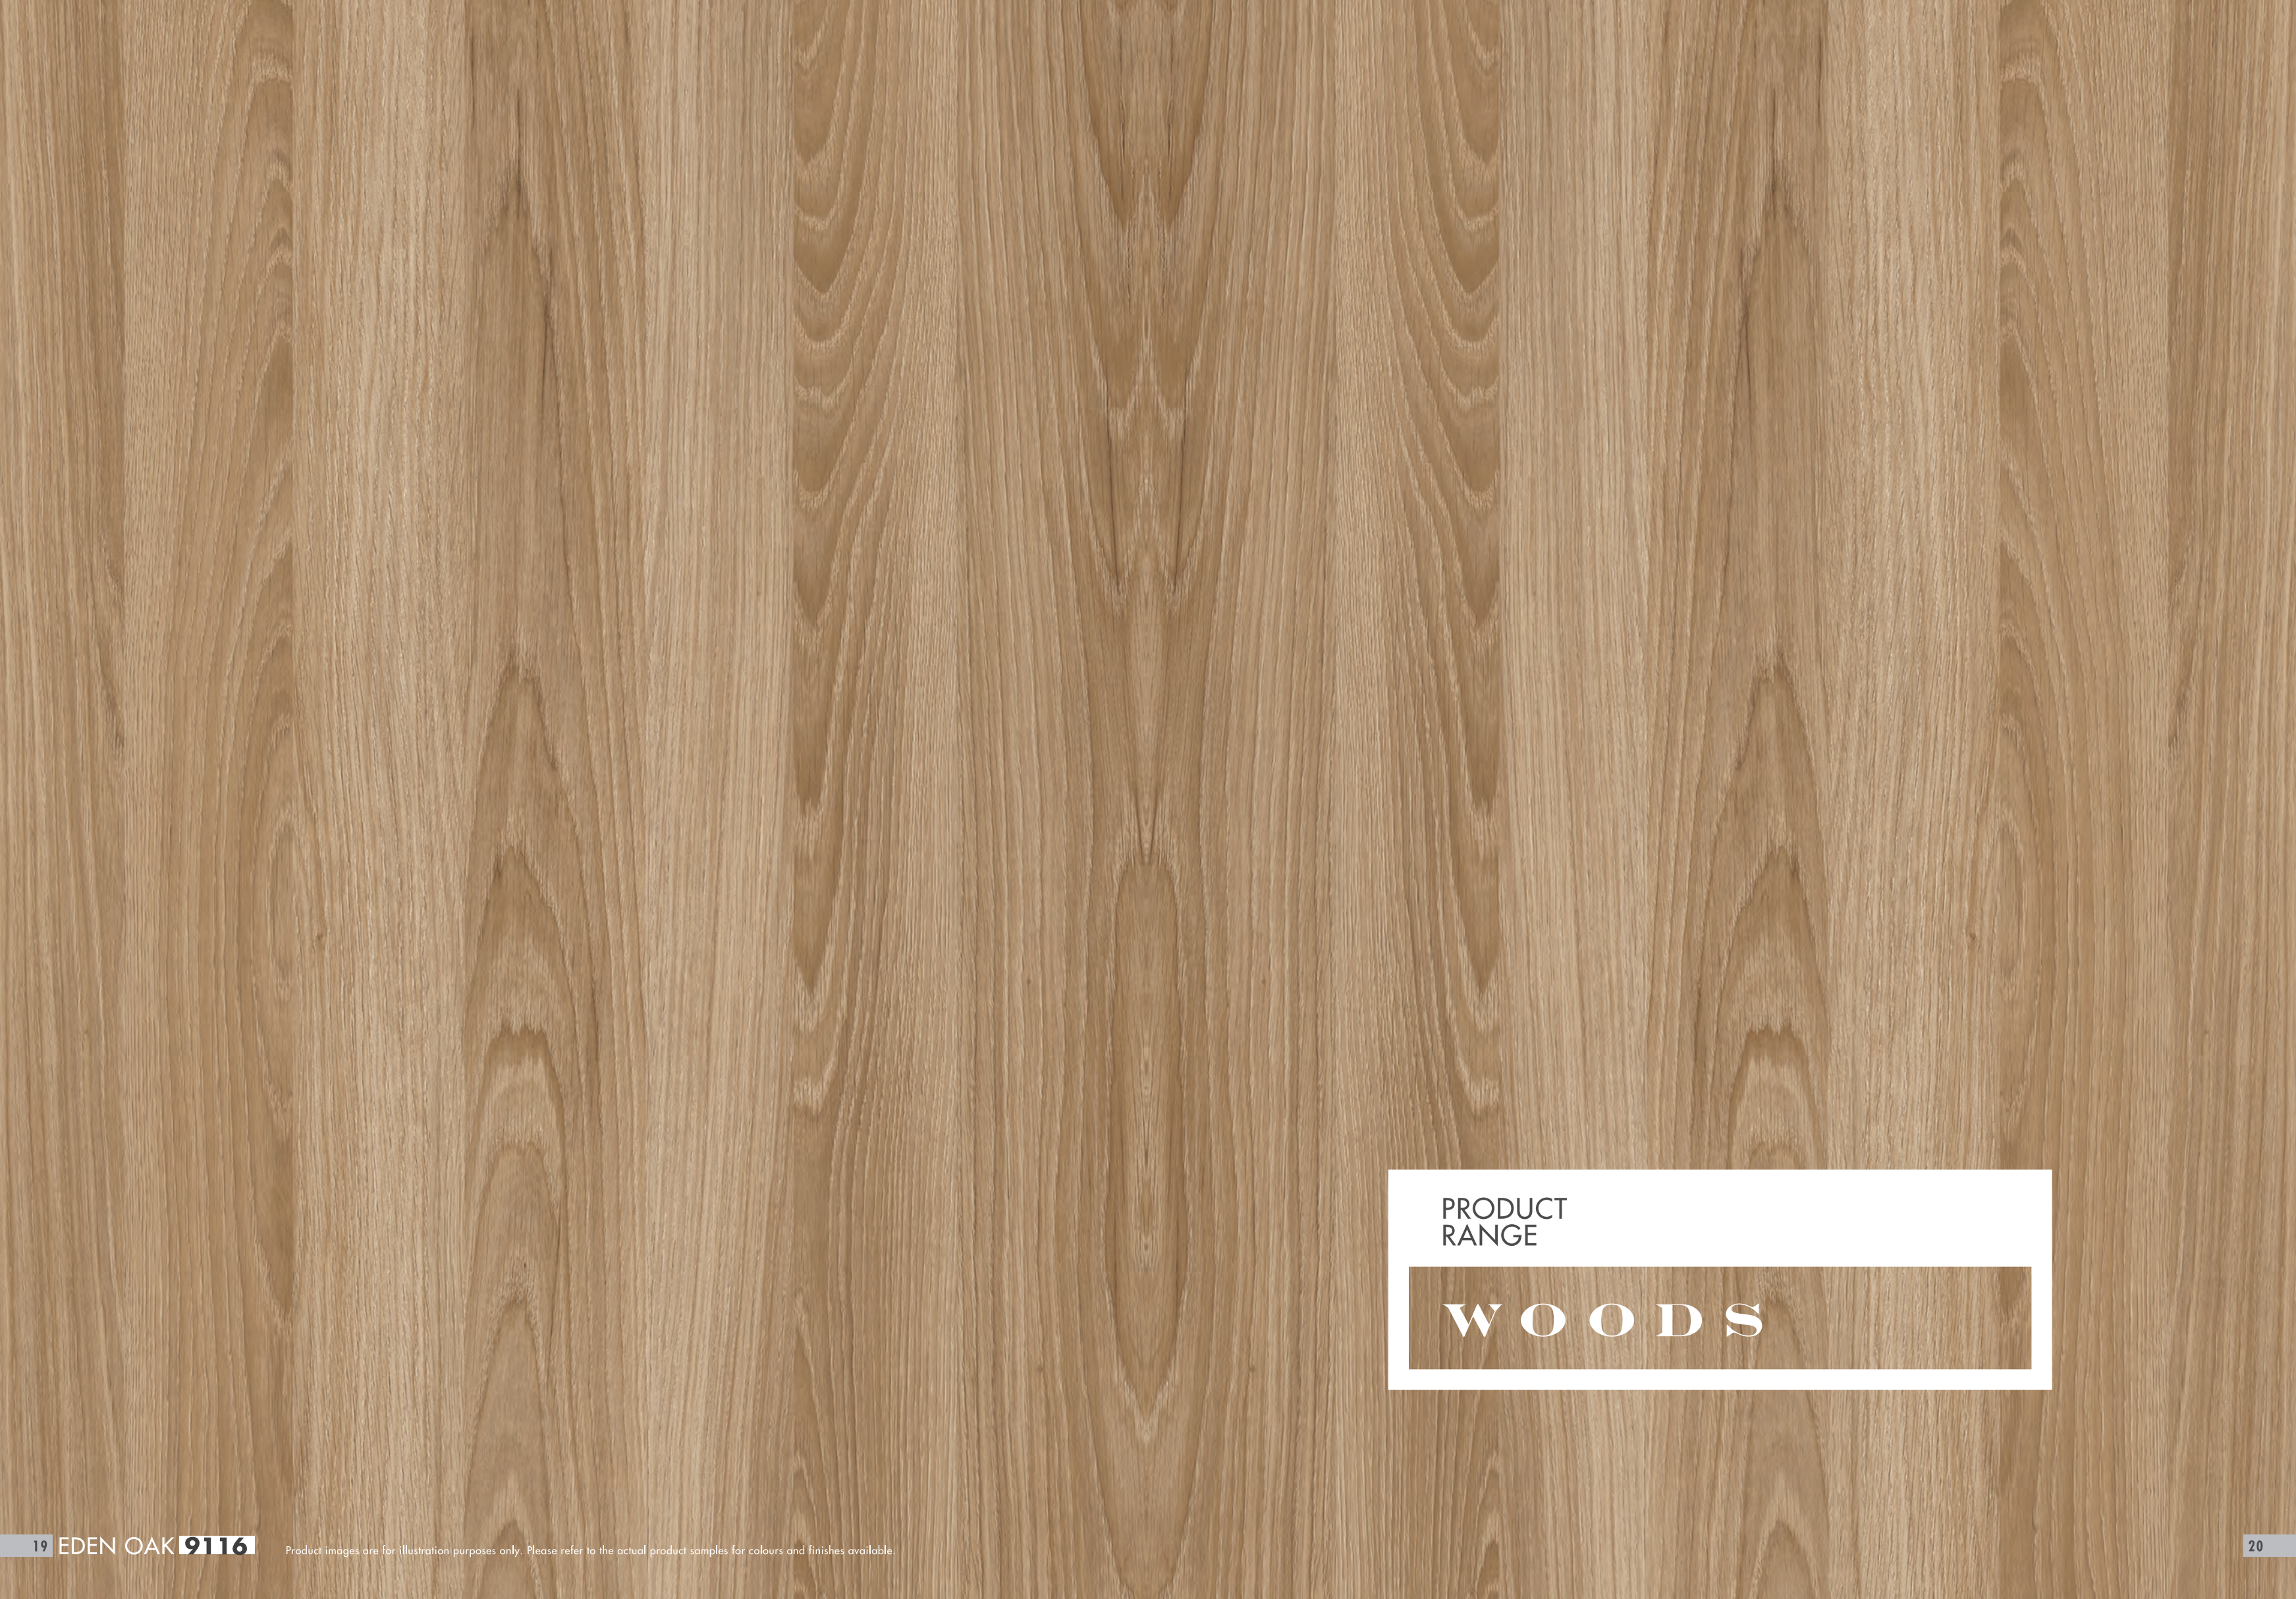

PRODUCT
RANGE

W O O D S



NEW

MORGAN OAK **9118**



NEW


EDEN OAK **9116**

Samples shown are for colour and texture reference only



NEW

SUNBURN OAK **9117**

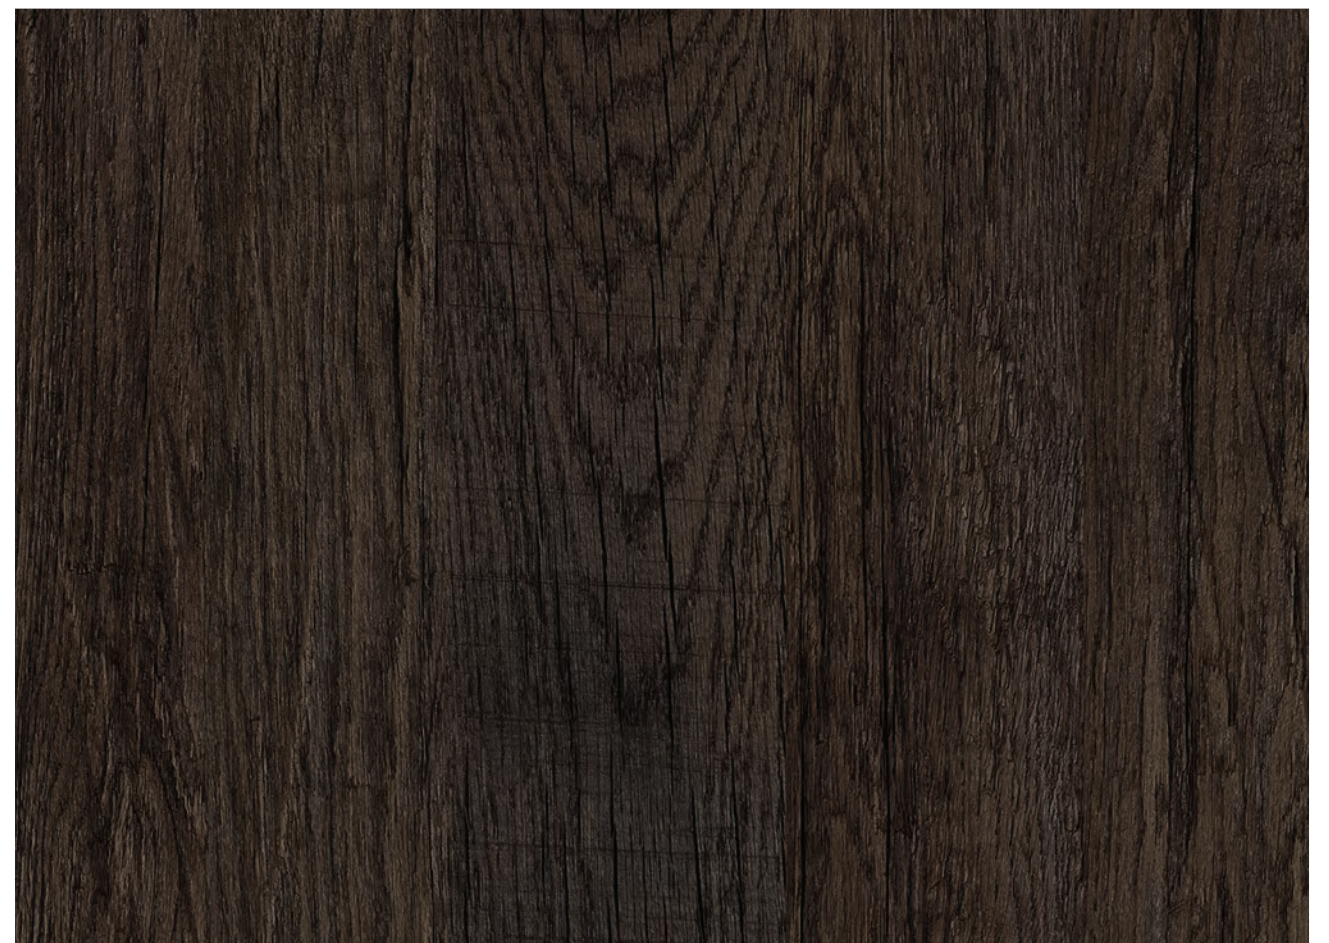


NEW

DEAGIO OAK **9119**


Samples shown are for colour and texture reference only




OREGON OAK **9114**

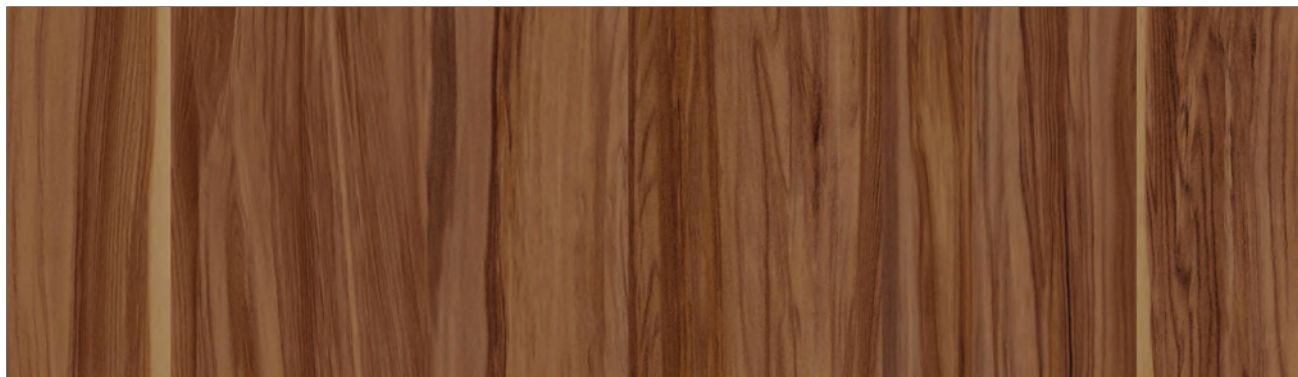

CARAMEL STREAK **9105**

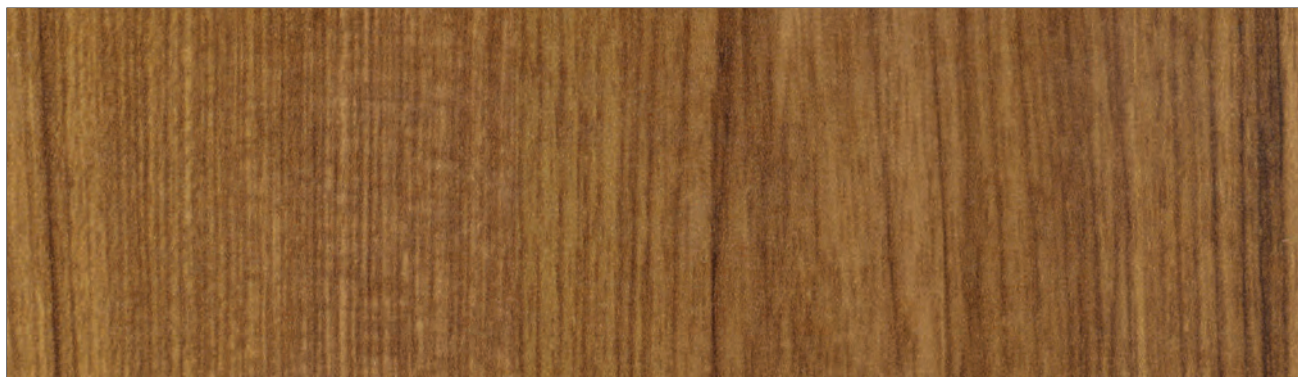


TRUSTED TEAK **9112**

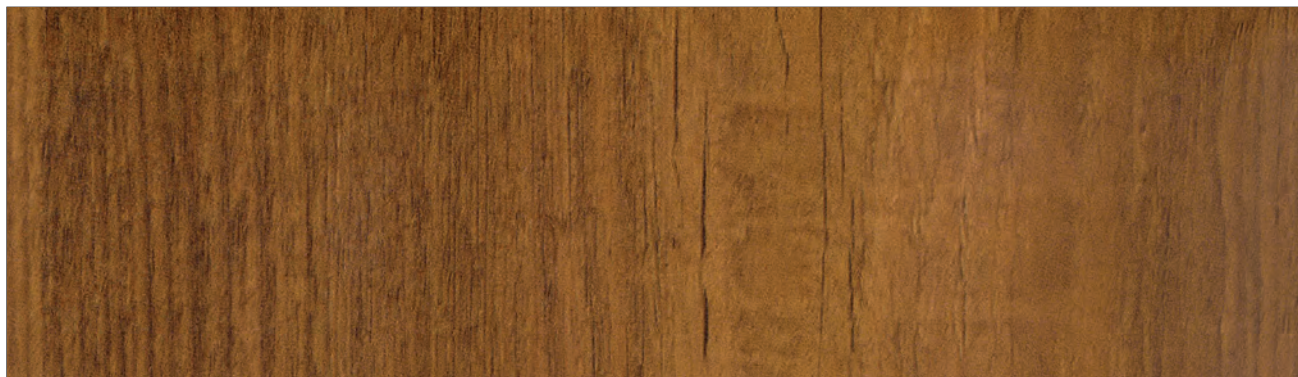

NOVACENTO PINE **9111**


Samples shown are for colour and texture reference only

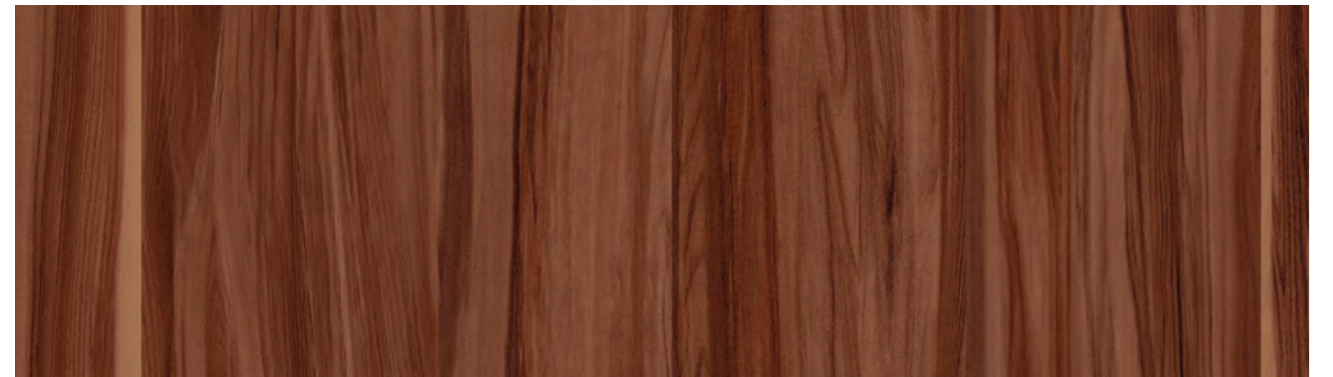


CORAL STREAK **9106**



ARCH WOOD **9108**

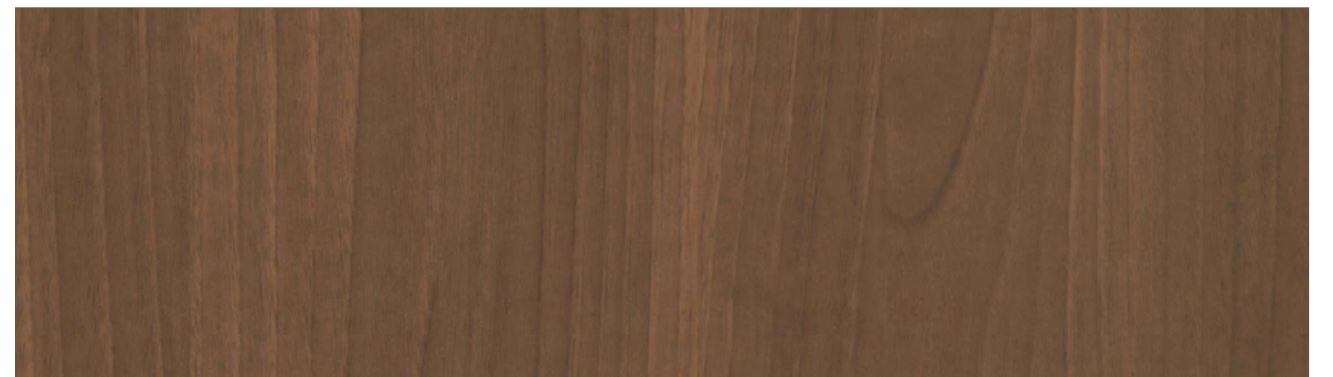

PURE WALNUT **9110**

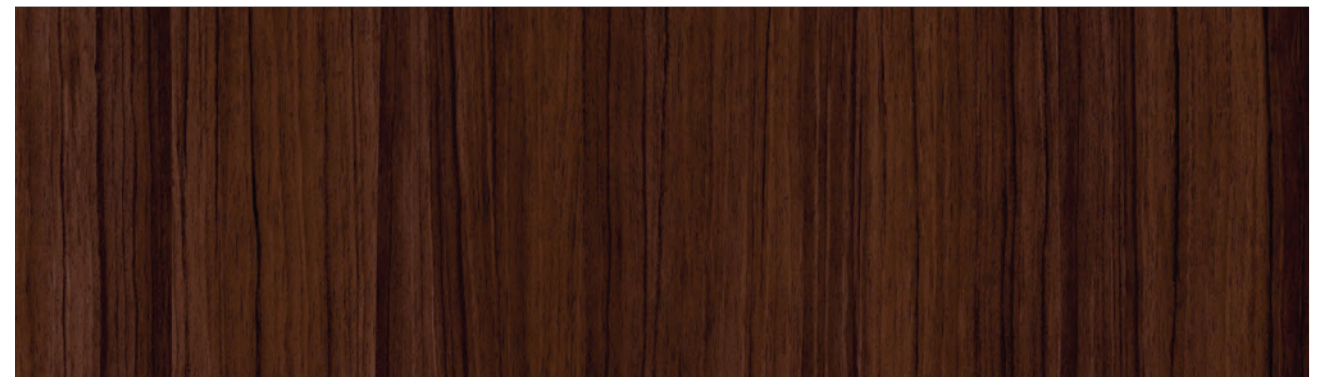


ENIGMA **9104**


Samples shown are for colour and texture reference only




ICELANDIC OAK **9113**

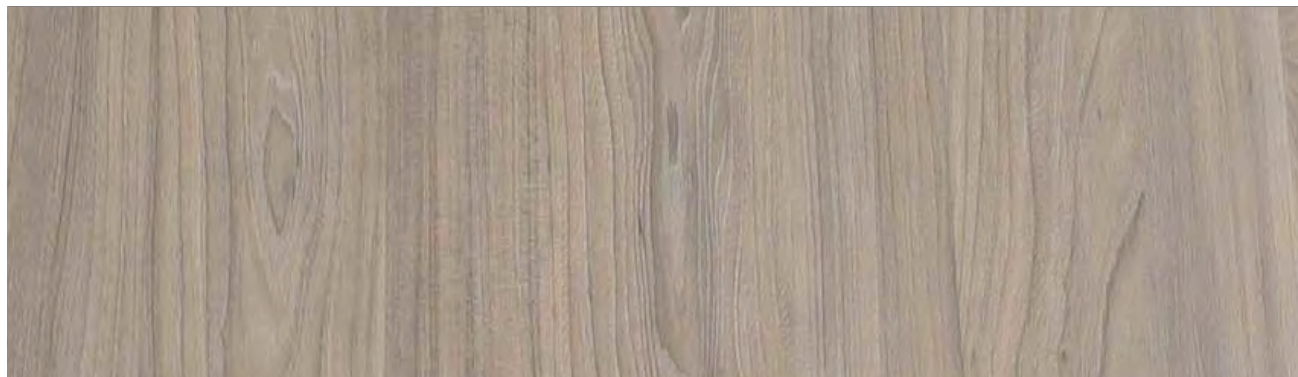


NEVADA ELM **9115**

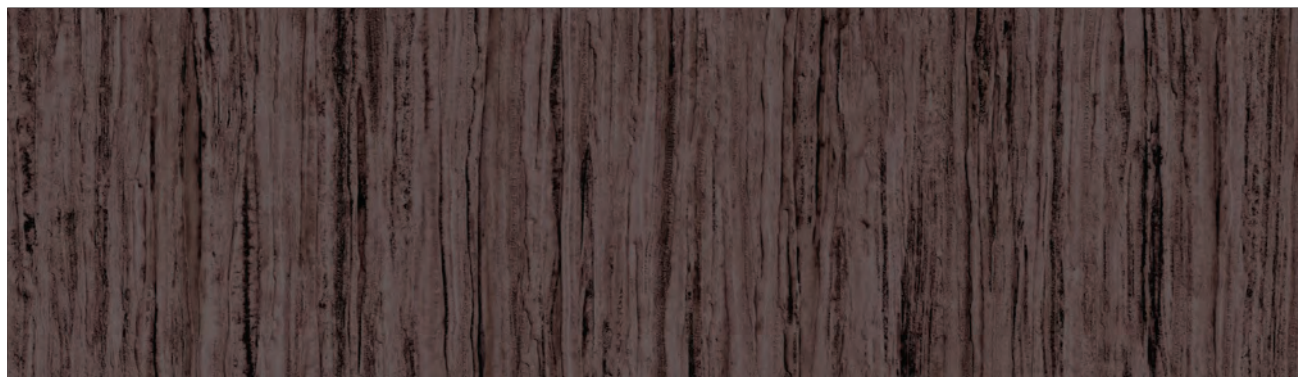


SNAKE WOOD **9109**

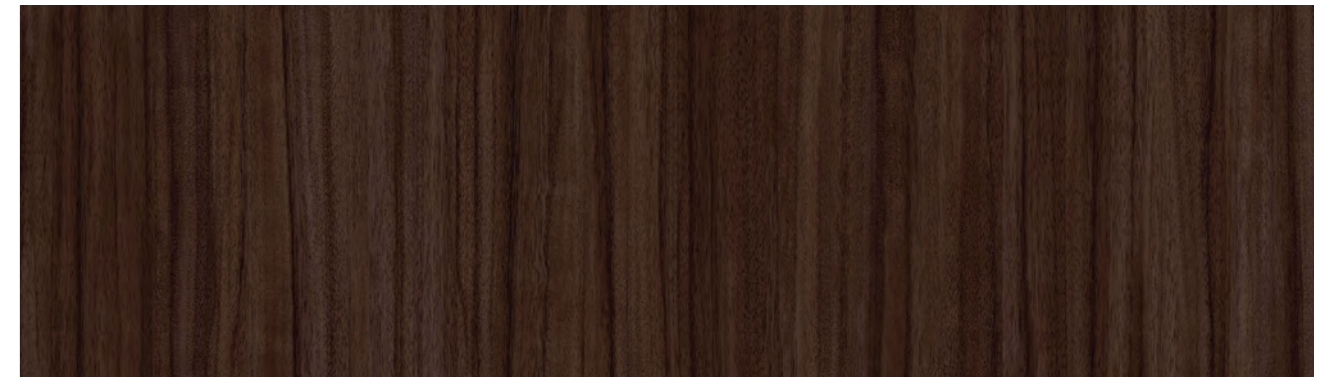

LORRAINE WALNUT **9107**

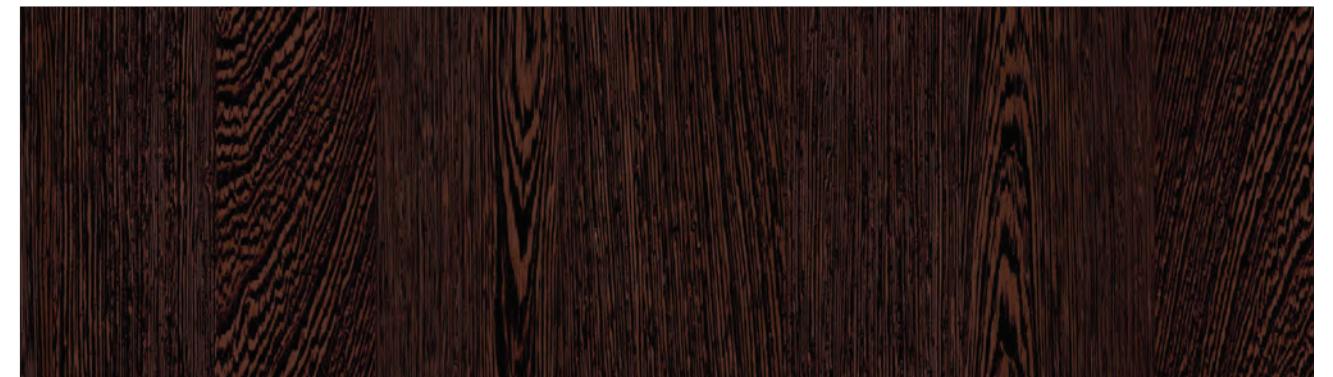

INNATE WENGE **9102**

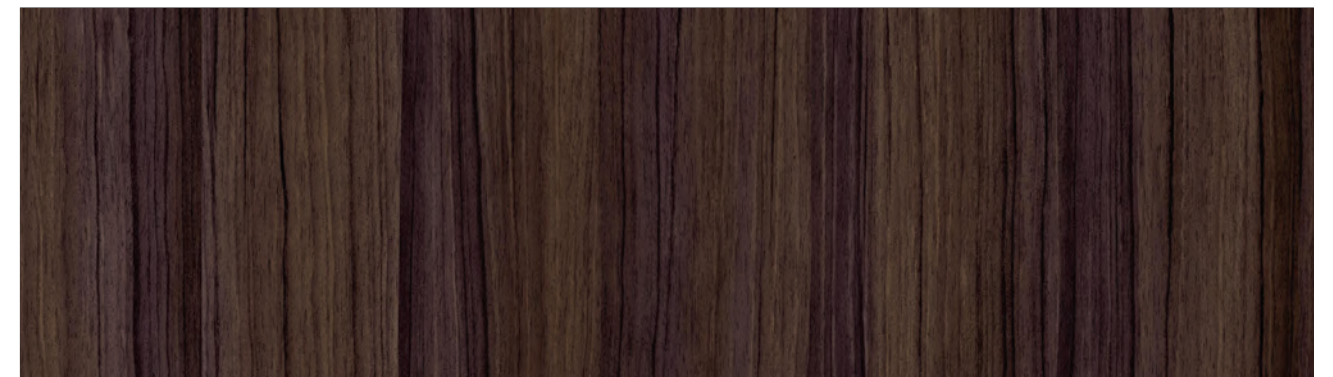

SMOLDERED WOOD **9103**

PRODUCT
RANGE

COLOURS



NEW

ROCK BROWN **9279**



MINERAL
YELLOW **9280** NEW



CLEAR
WHITE **9271**



OYSTER **9272**



NEW

SAGE **9278**



VERMILION
RED **9275**

Samples shown are for colour and texture reference only




NEW

MARINE BLUE **9281**



CANE **9276** NEW

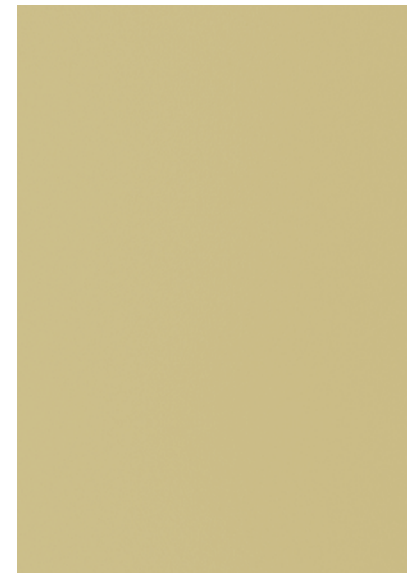

FRENCH
BEIGE **9277** NEW



CHOCO BROWN **9274**



MURKY GREY **9273**

Samples shown are for colour and texture reference only





9210 - LAVA MORENO



9119 - DEAGIO OAK



9112 - TRUSTED TEAK



9112 - TRUSTED TEAK

9207 - HARBOUR




9271 - CLEAR WHITE

9110 - PURE WALNUT



9108 - ARCH WOOD

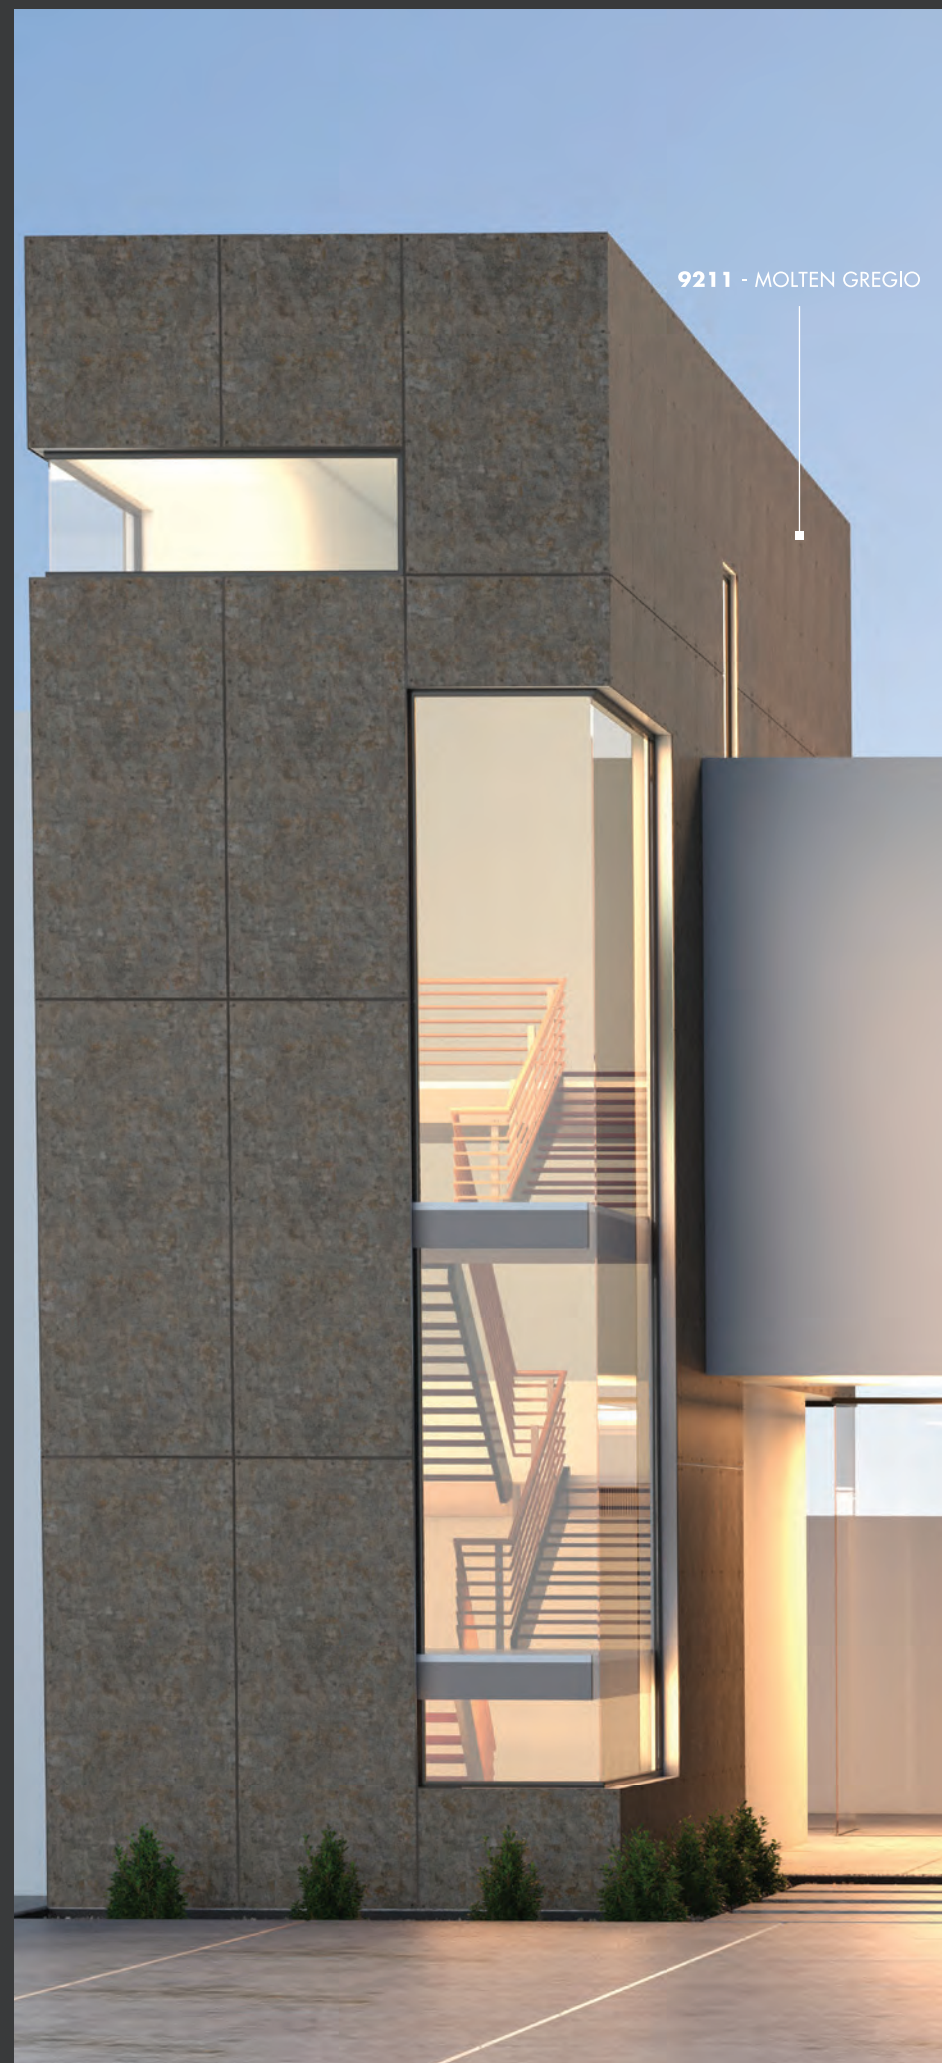

9211 - MOLTEN GREGIO



9110 - PURE WALNUT



9118- MORGAN OAK

QUALITY ASSURANCE



*To know more on test reports please visit www.greenlamclads.com



TECHNICAL SPECIFICATIONS

Product: Greenlam Exterior Clads 1.30m x 3.05m

Properties	Unit	Test Method as per EN 438 Part 2 : 2016	Specified Values as per EN 438 Part 6: 2016	Greenlam Clads' Results
Physical & Dimensional Properties				
Classification	EN 438-6- 4	Exterior Severe Use Flame Retardant Grade, Edf		
Surface Quality (Dirt, Spots etc.)	mm²/M²	EN 438-6, 5.2.4	2.0 (max)	Complies
Fibers, Hairs & Scratches etc.,	mm/M²	20.0 (max)		Complies
Thickness & Maximum Variation	mm	EN 438-2 – 5	2,0 ≤ t < 3,0 : ± 0,20 3,0 ≤ t < 5,0: ± 0,30 5,0 ≤ t < 8,0 : ± 0,40 8,0 ≤ t < 12,0: ± 0,50 12,0 ≤ t < 16,0: ± 0,60 16,0 ≤ t < 20,0: ± 0,70 20,0 ≤ t < 25,0: ± 0,80 25,0 ≤ t: As agreed	Complies
Length & Width	mm	EN 438-2 – 6	+10mm /-0mm	+5mm /-0mm
Flatness	mm/M	EN 438-2 – 9	2,0 ≤ t < 6,0 : 8.0 6,0 ≤ t < 10,0 : 5.0 10,0 ≤ t : 3.0	Complies
Edges Straightness	mm/M	EN 438-2 – 7	1.5 (max)	≤ 1
Edges Squareness	mm/M	EN 438-2 – 8	1.5 (max)	Complies
Density	g/cm³	EN ISO 1183 -1 :2004	1.35	1.38
Dimensional Stability at Elevated Temperature		EN 438-2 – 17		
a) Longitudinal	%		0.30(max.)	0.18
b) Transverse	%		0.60 (max)	0.38

Mechanical Properties				
Resistance to Wet Conditions,	EN 438-2 : 15			
Increase in Mass		%	8.0 (max)	4.1
Surface Rating		Rating	4 (min)	5
Edge Rating		Rating	3 (min)	3
Resistance to Impact by Large Diameter Ball	EN 438-2 -22			
Drop Height		mm	1800	2000
Diameter of Indentation		mm	10 (max)	7
Flexural Strength	EN ISO 178:2003	Mpa	80 (min)	100
Flexural Modulus	EN ISO 178:2003	Mpa	9000(min)	10700
Thermal Conductivity	EN 12524:2000	W/M*K	No Requirement	0.24
Resistance to Fixing (Screw Pull Out Strength)	ISO 13894-1; 9	N	2000 (min)	Meets

Light Fastness & Weather Resistance				
Resistance to Climatic Shock				
a) Flexural Strength Index	EN 438-2 : 19	Rating	Appearance -4 (min)	4
b) Flexural Modulus Index		Rating	Ds – 0.80 (min)	Meets
		Rating	Dm – 0.80 (min)	Meets
Resistance to Artificial Weathering Including Light Fastness, After 650 MJ/M² Radiant Exposure, (for Over 3500 Hours of Exposure)	EN 438-2-29	Rating (after 3000 Hours as per Standard)	Grey Scale contrast-3 (min) Appearance- 4 (min.)	3~4 4~5
Resistance to UV Light, after 1500 Hours Exposure	EN 438-2-28	Rating	Grey Scale Contrast-3 (min) Appearance- 4 (min.)	3~4 4~5

Properties	Unit	Test Method	Specified Values	Greenlam Clads Results
Fire Performance				
Reaction to Fire	EN 13501-1-2017	Euro Class	≥ 6.0mm -B-s2, d0	B-s1, d0
Surface spread of flame	UL 723	Class	A	A
Flame Spread Index		Index	0-25	Meets
Smoke Development Index		Index	0 - 450	Meets
Calorific Value	ISO 1716: 2010	MJ/ Kg	19.91 (max)	Meets

Health Characteristics				
Anti-Bacterial Efficacy & Activity	JIS 2801-2012			
% Reduction in 24 hours		%	95.0 (min)	99.99
Activity After 24 hours		Log Reduction	2.0 (min)	Exceeds
Anti-Fungus Efficacy	ASTM G-21-2015			
Growth Atfter 28 days		Class	1	0 (No Growth)

Corrosion Resistance				
Resistance to Corrosion with 5% Sodium Chloride Spray	ASTM B 117	Hours	500 Minimum (Industry standard)	Exceeds 700
Resistance to acid rains (of 10% HCl)		In House	Hours	None 24

Properties	Unit	Test Method	Specified Values	Greenlam Clads Results
------------	------	-------------	------------------	------------------------

Sound Insulation Characteristics In Building & Building Elements				
Sound Transmission Class (STC)	IS: 9901 (Part III)-1981, DIN: 52210 Part 1-1983 ISO: 10140 (Part II)/ ASTM – E - 90	Class	No Specification	28

Class (Rating) : 1 = Surface Damage 2 = Severe appearance alteration 3 = Moderate Change 4 = Slight change visible from certain angle 5 = No Change

Bacteria Tested: 1. Pseudomonas Aeruginosa, 2. Enterococcus Faecalis, 3. Candida Albicans, 4. Pseudomonas Aeruginosa, 5. Escherichia Coli, 6. Klebsiella Pneumoniae, 7. MRSA (Methicillin Resistant Staphylococcus Aureus), 8. Salmonella Enterica

Fungus Tested: 1.Aspergillus niger, 2. Penicillium funicolosum, 3. Gliocladium virens, 4. Chaetobium globosum 5. Aurobasidium pullulans

Note: Greenlam products are manufactured thoroughly to standards. The values given above are to the best of knowledge but without liability/warranty, expressed or implied.



GLOBAL HEADQUARTER

2nd Floor, West Wing, Worldmark 1, Aerocity IGI Airport Hospitality District, New Delhi-110037.

Tel: +91 11-4279-1399, Email: info@greenlam.com, Web: www.greenlam.com, www.greenlamindustries.com



www.greenlam.com



[greenlam01](https://twitter.com/greenlam01)



[greenlam_laminate](https://www.instagram.com/greenlam_laminate)



[greenlamindustries](https://www.youtube.com/greenlamindustries)



[greenlamlaminate](https://www.facebook.com/greenlamlaminate)



Scan QR Code
To Visit:

www.greenlamclads.com

Not for Sale